

QUARTZ TIMER



QBT-201

An Intelligent Timer for Offices, Schools, Factories, etc. Melody Time Signal Can be Programmed for Up to One Week.

Highly functional timer for office, school, factory, etc., with a weekly melody time signal program

The QBT-201 offers 4 refreshing melodies for hourly time signals, and different melodies can be used at the beginning of the work day, lunch hour, end of the day, etc. Up to 60 programs can be set on QBT-201. Its superior function and sophisticated design make it a necessity for any office.

4 built-in melodies

You can select one of four melodies to use as a time signal.

Design

A sophisticated exterior with easy-to-read dial.

CONTENTS		SPECIFICATIONS
Input power supply		AC 100V-120V, AC 200V-240V, 50/60Hz
Power consumption		10W
Power failure backup		Clock : 10 hours, program : 2 weeks
Operating temperature range		-10°C ~ +50°C
Time accuracy		Within 5 sec./month
Signal output		Independent 2 channels
Contact out put capacity		AC 125V, 5A or AC 250V, 3A, DC 30V, 5A
Program setting range		Set in one-minute increments
Melody output	4 melodies are preset for hourly time signal.	Westminster Bell : Approx.36sec. Baby Elephant Walk : 36sec. Music Box Dancer : 36sec Edelweiss : 42sec.
	Built in speaker	500 mW
	Line output	150 mV (47k)
Dimensions		372(W)×270(H)×62.4(D)mm, Approx. 2kg, Dial diameter : φ249.5mm


2channels are available for external equipments.

Not only playing the melodies at any desired time, but also controlling external equipment by using 2 channels for signal output, for example.

- to broadcast a melody outside by connecting external amplifier and speakers
- to sound an external buzzer or siren by connecting external amplifier and speakers
- to turn on/off night light
- to turn on/off air conditioner
- to control water facilities

Weekly programming

Up to 60 programs can be set on the timer. Even if you need a different time table everyday, you can set programs for one week.

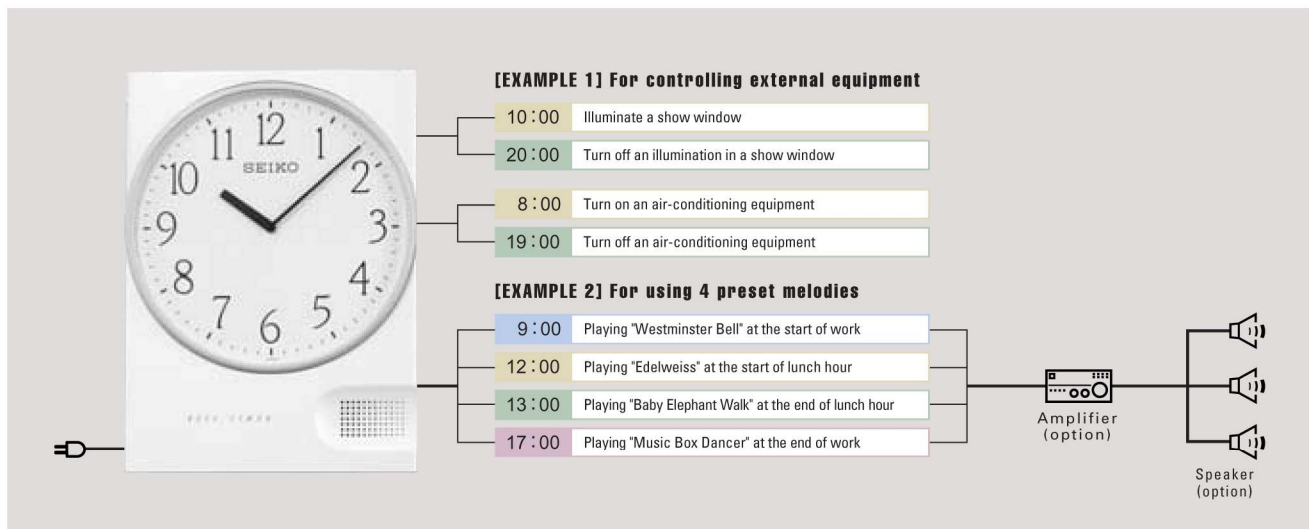

GFClock Yasa Persada, Jakarta

<http://masterclock.gfclock.com> | <http://gfclock.indonetwork.co.id>

Calls: +62 818 8020 45

Blackberry: 2880ECDC

SEIKO

QUARTZ TIMER



QUARTZ TIMER QBT-30

An intelligent timer for
offices, schools, factories,
and other locations.

Melody time signals are programmable
for up to one week.



GFClock Yasa Persada, Jakarta

SEIKO

QUARTZ TIMER QBT-30

Announces the start of work, lunchtime, and the end of work with beautiful melodies. Refined design and outstanding function make this a necessity for every office.


- Up to 60 programs can be set a week at a time.
- Different settings for each day of the week are OK.
Resetting for different times each day is simple and convenient.
- The 10 melodies can be combined as preferred.
- External output can be used to manage lighting, air-conditioning, and so on.

Westminster Chime(40 Sec.)	Edelweiss(42 Sec.)
Melody Fair(43 Sec.)	Chim Chim Cheree(40 Sec.)
Bibbidi-Bobbidi-Boo(30 Sec.)	Yuyake Koyake(40 Sec.)
Going Home(45 Sec.)	Etude Op. 10, No. 3(45 Sec.)
Beauty and the Beast(44 Sec.)	A Whole New World(41 Sec.)



For example, a setting like this is easy to do!

Manage time at school or in the office or the way you've always wanted to!

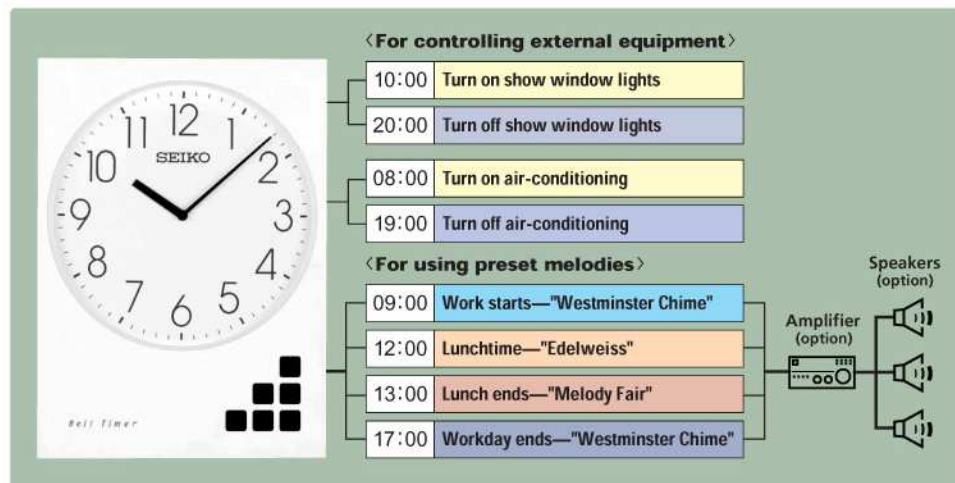

SPECIFICATIONS	
Input Power supply	AC90V~AC120V, AC200V~AC240V, 50/60Hz
Power consumption	approx. 4.0W
Power failure backup	Clock : 24 hours, Programs : 10 years
Operating temperature range	-10°C ~ +50°C
Timing accuracy	Within ±3 sec./month (+5~+35°C)
Signal output	2 independent channels (dry contact signal)
Contact output capacity	AC125V / 5 A, AC250V / 3A, DC30V / 5A
Program setting range	In 1-minute increment
Dimensions	W270×H372×D58.5 (mm)
Weight	approx. 2.0 kg (main body)

GFClock Yasa Persada, Jakarta

<http://masterclock.gfclock.com> | <http://gfclock.indonetwork.co.id>

Calls: +62 818 8020 45
Blackberry: 2880ECDC